

Manrider winches are air winches, which enables their use under a wide range of conditions. They are certified and meet all the requirements placed on manriding equipment.


Load capacity: 5 t max.



Manrider transport winches						
Load capacity in t	Function	1st layer line speed at rated load in m/min	Max. air consumption in m ³ /min.	Drum size in mm	Recommended wire rope diameter	Maximum number of wire rope layers
1.445	Manriding	23	9.5	610	13	8
3.123	Manriding	21	19.9	610	19	8

Manrider transport winches					
Wire rope on drum in m, 1st layer	Wire rope on drum in m, 2nd layer	Wire rope on drum in m, 3rd layer	Wire rope on drum in m, last layer	Weight without wire rope in kg	
42	88	137	437	411	
39	81	127	410	916	

Dimensions manrider transport winches			
Load capacity in t	A	B	C
1.445	1,292	610	597
3.123	1,500	889	787
Dimensions in mm			

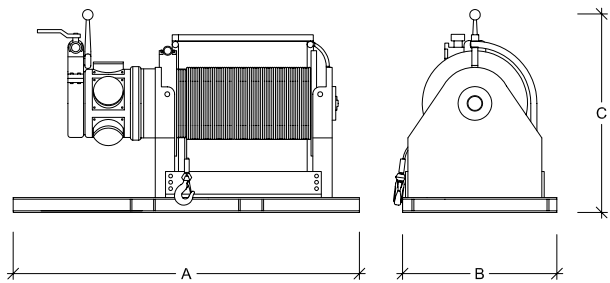

Dimensions floor plate					
Load capacity in t	A1	A2	A3	B1	Ø
1.445	254	254	254	508	17.5
3.123	267	267	267	794	21
Dimensions in mm					

